


PULL-WIRE EMERGENCY STOP SWITCHES ACCESSORIES



* The greyed out components are not required if using the rope tensioner S 900.

① Wire rope

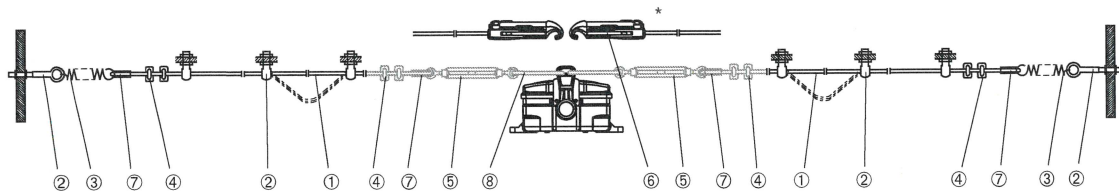

- With red PVC sheath
- Ø total 5 mm
- Ø of the steel core 3 mm

on request

② Eyebolt or anchoring hook



- Eyebolt
BM 8 x 70 stainless steel
- Anchoring hook
ACC-EBLT-M8-RVA-5PCS

101193046

103031496

③ Tension spring



- ACC-RS65X-TS
- Stainless steel tension spring with elongation limiter

103032772

④ Wire clamp



- 3 mm stainless steel

101203477

⑤ Tensioner



- Tensioner M6 (Galvanised steel)
Setting range 145 ... 225 mm
- ACC-TBLE-RVA (Stainless steel)
Setting range 180 ... 250 mm

101087930

103031494

⑥ Rope tensioner S 900



- Wire tensioner S 900
- Smooth and time-saving adjustment

101186704

⑦ Wire thimble



- 3 mm stainless steel

101203472







⑧ Shackle



- Bracket with threaded bolt, stainless steel

101186490

PULL-WIRE EMERGENCY STOP SWITCHES ACCESSORIES

Eyebolt	Anchoring hook	Anchoring hook
 <p>Galvanised steel ■ BM 10 x 40 101084928</p> <p>Stainless steel ■ BM 8 x 70 stainless steel 101193046</p> <p>Included in delivery: Eyebolt with nut</p>	 <p>Galvanised steel ■ ACC-EBLT-M8-5PCS 103031495 ■ ACC-EBLT-M10-5PCS 103031498</p> <p>Included in delivery: Anchoring hooks incl. 2 nuts and washers, packaging unit: 5x</p>	 <p>Stainless steel ■ ACC-EBLT-M8-RVA-5PCS 103031496 ■ ACC-EBLT-M10-RVA-5PCS 103031499</p> <p>Included in delivery: Anchoring hooks incl. 2 nuts and washers, packaging unit: 5x</p>
Wire clamp	Duplex wire clamp	Egg-shaped wire clamp
 <p>Stainless steel ■ 3 mm 101203477</p>	 <p>Stainless steel ■ 3 mm 101190917</p>	 <p>Stainless steel ■ 3 mm 101196043</p>

For detailed information on selection, visit products.schmersal.com.

PULL-WIRE EMERGENCY STOP SWITCHES ACCESSORIES

Wire thimbles	Pulley	Pulley
 <p>Stainless steel ■ 3 mm</p> <p>101203472</p>	 <p>Galvanised steel ■ Pulley</p> <p>101192433</p>	 <p>Stainless steel ■ ACC-PWR-PLY</p> <p>103037516</p>
S 900 rope tensioner	Tensioning Jack	Tension spring with elongation limiter
 <p>Plastic / stainless steel ■ Rope tensioner S 900 ■ Smooth and time-saving adjustment</p> <p>101186704</p>	 <p>Galvanised steel -M6 ■ Tensioner M6 ■ Setting range 145 ... 225 mm</p> <p>101087930</p> <p>Stainless steel -M8 ■ ACC-TBLE-RVA ■ Setting range 180 ... 250 mm</p> <p>103031494</p>	 <p>Stainless steel ■ ACC-RS65X-TS</p> <p>103032772</p>

PULL-WIRE EMERGENCY STOP SWITCHES ACCESSORIES

Wire rope	Wire unit complete	Wire rope mounting set
 <p>Steel rope, 3 mm</p> <ul style="list-style-type: none"> ■ Pull wire PWR-xxM ■ With red PVC sheath ■ Ø total 5 mm ■ Ø of the steel core 3 mm <p>on request</p>	 <p>Steel rope, 3 mm</p> <ul style="list-style-type: none"> ■ Wire unit ■ Ready-to-fit <p>on request</p> <p>Included in delivery: 1x wire rope, assembled on one side with eyebolt including nut, plus 1x wire thimble; 2x wire clamps</p>	 <p>■ ACC-RK-RS65X 103036965</p> <p>Included in delivery: 2x eyebolt with 2x nut, 2x tension spring, 4x wire thimble, 8x rope clamp, 4x shackle, 2x turnbuckle M8</p>
Wire rope mounting set	Marking label	Locking screw M25 x 1.5
 <p>■ ACC-RK-RS65X-QR 103036963</p> <ul style="list-style-type: none"> ■ Quick-clamping system <p>Included in delivery: 2x eyebolt with 2x nut, 2x tension spring, 2x wire thimble, 4x rope clamp, 2x rope tensioner</p>	 <p>■ ACC-PWR-ESLB-50PCS 103032469</p> <ul style="list-style-type: none"> ■ Sticker for emergency-stop release rope ■ According to ISO 13850 ■ Packaging unit: 50x on a roll 	 <p>Plastic</p> <ul style="list-style-type: none"> ■ ACC-BPL-M25-2PCS 103032753 ■ Tightening torque 10 Nm ■ Packaging unit: 2x <p>Nickel plated brass</p> <ul style="list-style-type: none"> ■ ACC-BPL-M25-MS 103006010 ■ Tightening torque 8 Nm ■ Packaging unit: 1x

For detailed information on selection, visit products.schmersal.com.

PULL-WIRE EMERGENCY STOP SWITCHES ACCESSORIES

Cable gland M25 x 1.5	Cable gland M25 x 1.5	Cable gland M25 x 1.5
		
<p>Nickel plated brass</p> <ul style="list-style-type: none"> ■ ACC-CGLD-M25-MS 103006012 ■ Authorised cable diameter 9 ... 16 mm ■ Tightening torque 8 Nm ■ Packaging unit: 1x 	<p>Thermoplastic</p> <ul style="list-style-type: none"> ■ ACC-CGLD-M25-2PCS 103032752 ■ Authorised cable diameter: 9 ... 17 mm ■ Tightening torque 10 Nm ■ Packaging unit: 2x 	<p>Thermoplastic with pressure compensation element</p> <ul style="list-style-type: none"> ■ ACC-CGLD-P-M25-2PCS 103031491 <p>Brass, nickel-plated with pressure compensation element</p> <ul style="list-style-type: none"> ■ ACC-CGLD-P-M25-MS-2PCS 103031489 ■ Authorised cable diameter: 9 ... 17 mm ■ Tightening torque 8 Nm ■ Packaging unit: 2x